

Outdoor Heaters

Bromic Heat-Flo™ Gas LPG Radiant Heaters

- To be installed by an authorised person in accordance with AS 5601 TM
- For use in outdoor areas (Minimum room volume 250 cubic metres)
- Do not operate this unit in unventilated areas
- This appliance is not approved for indoor domestic use
- Maximum carton weight 13kg
- Available in NG and LPG
- Available in a 3 tile and 5 tile models
- Excludes hose & regulator

Heat-Flo™ Tile Heaters



3-Tile



5-Tile

Accessories


Heat Deflector
(See table for part numbers)



Heat-Flo Surround
(See table for part numbers)



Recommended Minimum Installation Clearances

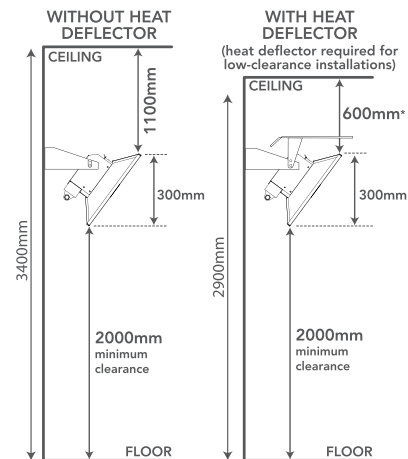

Number of Tiles	3 Tiles	5 Tiles
HEAT-FLO™ Part No. LPG*	2620100-1	2620120-1
HEAT-FLO™ Part No. NG*	2620101-1	2620121-1
Heat Deflector Part No.**	2620162	N/A
HEAT-FLO™ Surround Part No.**	2620161	2620172
Heat Output on LPG (MJ) (BTU)	25MJ (25,300 BTU)	45MJ (42,000 BTU)
Approximate area heated in m ²	up to 16m ²	up to 25m ²
Gas connection	3/8" SAE	3/8" SAE
Gas consumption per 45kg	90 hours approx.	50 hours approx.
Dimensions (WxHxD mm)	499 x 334 x 180mm	695 x 334 x 180mm
Weight (kg)	5.8	7.1
Ceiling clearance required (m)	1.2	1.2
Stand dimensions (WxDxH mm)	480 x 430 x 2100mm	n/a

*Must only be installed by a licensed technician
**Must complete "Installation Checklist" before installing